

SYS-E Outrigger Shelving


Assembly Instruction

Overall Image:




There are 2 types of post:

- Outrigger Post: which has outrigger at the front.

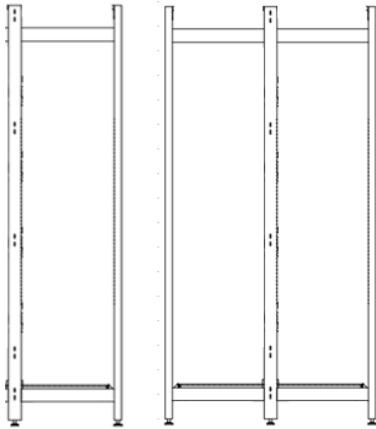

- Mid Post: which is either L Shaped or T Shaped?

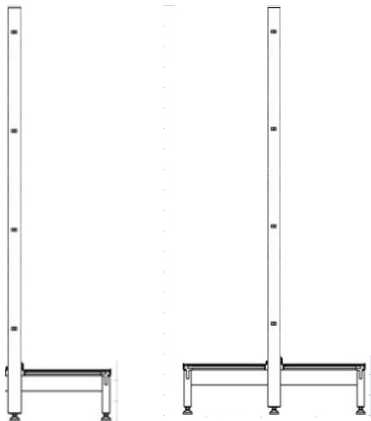

Step 1:

Place 1 Outrigger Post and 1 Mid Post away from each other. Ensure the black adjustable feet are leveled with the floor. Secure the Mesh Backing using screws provided. Then connect Top Enhancing Bar on top of the Mesh Backing.


Now you will see half of 1830mm bay is upstanding.



Step 2:

Put 2nd Outrigger Post away from the existing Mid Post, then secure another Mesh Backing using Screws and Top Enhancing Bar.


Carefully clip in the Base Beam 1830mm across between the 2 Outrigger Posts at the bottom.

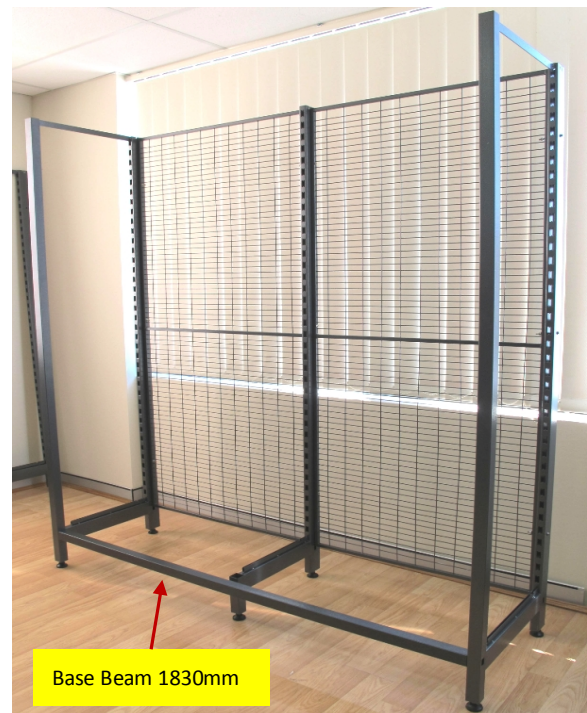

Base Beam 1830mm


Step 3:

Click in the Top Beam Outside E1830 across the 2 Outrigger Post at the top.

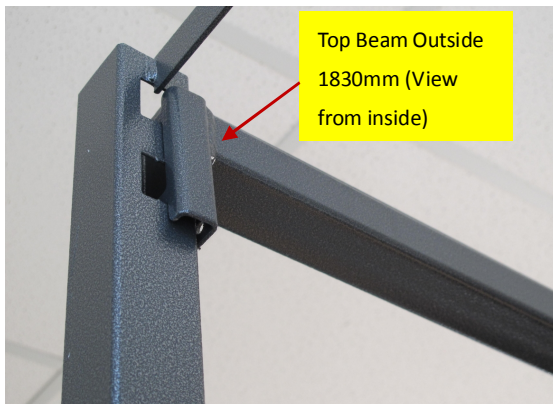

Step 4:

Place the Top Beam Inside E915 in between 1 Outrigger Post and 1 Mid Post at the top, so top shelf can rest on it.

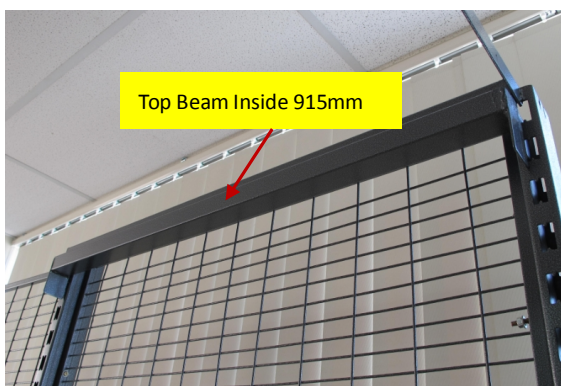

Step 5:

Then carefully place base shelf, it will rest on Top Beam Inside and Top Beam Outside.



Step 6:

Lastly place base shelf and middle shelves.



Top Beam Outside 1830 Top Enhancing Bar 915 Top Beam Inside 915

